REV	DATE	CLASS	REVISION RECORD	DR	CK
C	21APR06	D	ECN 18899 ADD 6.83, CHANGE 74 MAX WAS 73 MAX, 58.0±0.2 WAS 56.0, 0.94±0.2 WAS 0.94	RBP	SD
D	24AUG06	D	ECN 20428; CHANGE 56.0±0.2 (J13) WAS 56.2±0.2	LP	RBP
E	11SEP06	D	ECN 20630; CHANGE Ø680 (G7) WAS Ø685	LP	FH
F	24NOV06	D	ECN 21364; ADD 501±5 120mm TRAVEL (F10)	NJC	MAN
G	02MAR07	D	ECN 22424; CHANGE: 320±5 (NOTE 7) WAS 310±5	LP	RBP
H	11DEC07	-	ECN 3000193 ADD RECOMMENDED CALIPER BOLT MAX TORQUE AND ENGAGEMENT (H14)	AWS	JJB



DETAIL Z
SCALE 0.500



SECTION B-B
SCALE 0.750



TOP VIEW
SCALE 0.500



DETAIL Y
SCALE 0.500

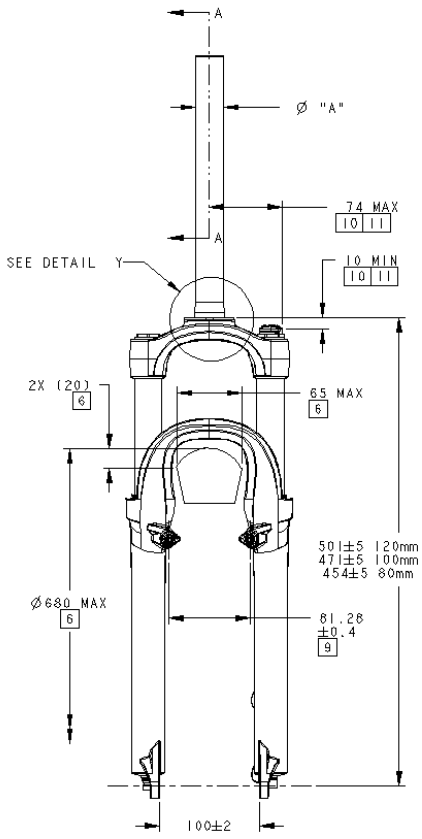

FRONT VIEW

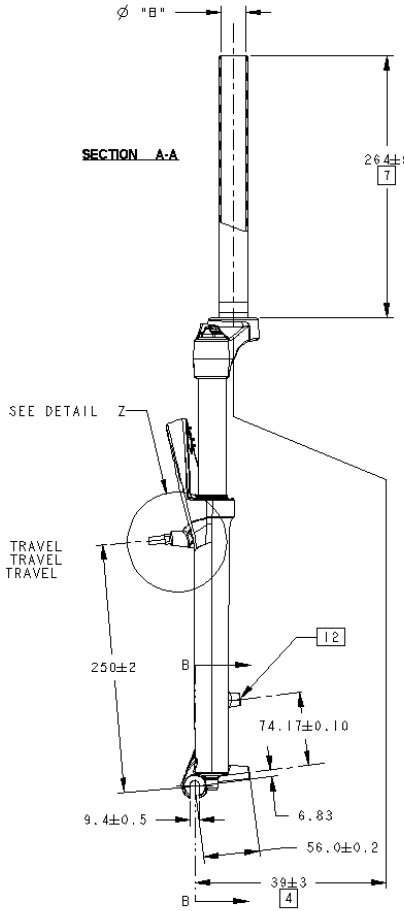

LEFT SIDE VIEW



PARTIAL BACK VIEW
DISC BRAKE SIDE

- STEER TUBE DETAILS -		
STEER TUBE TYPE	ØA mm	ØB mm
STEEL, THREADLESS, STANDARD	28.6 ± 0.07	25.4 ± 0.15
ALUMINUM, THREADLESS, OPTIONAL	28.6 ± 0.07	24.6 ± 0.15

NOTES:

1. DRAWING NOT TO SCALE, GENERAL SHAPE FOR DIMENSIONAL REFERENCE ONLY. SRAM RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE.
2. CROWN RACE TO BE MEASURED AS AVERAGE Ø; 3 DIAMETRIC POINTS MIN.
3. REFERENCE DIMENSIONS, NOTED WITH PARETHESIS "( )" ARE FOR CUSTOMER DESIGN INFORMATION ONLY.
4. DIMENSION IS PERPENDICULAR OFFSET FROM STEERER TUBE AXIS TO FORK DROP-OUT (FORK OFFSET DIMENSION).
5. HEADSET CUP INSIDE DIAMETER MUST NOT BE LESS THAN STEER TUBE DIAMETER +0.3mm.
6. IMPORTANT: CUSTOMER IS RESPONSIBLE FOR ENSURING MINIMUM REQUIRED TIRE CLEARANCE. DO NOT EXCEED MAXIMUM TIRE ENVELOPE INDICATED ON THIS DRAWING.
7. 320±5 mm STEER TUBE OPTION AVAILABLE PER REQUEST.
8. DISTANCE BETWEEN INSIDE OF DROPOUT AND CENTER DISC BRAKE POST.
9. MEASURED WITH DROPOUTS CONSTRAINED AT EXACTLY 100mm APART.
10. FORK / FRAME CLEARANCE (WORST CASE)
11. 3D FILES: US-4012-293-010.IGS AND US-4012-293-010.STP AVAILABLE UPON REQUEST FOR EXACT FORK ENVELOPE.
12. POST TYPE BRAKE CALIPER MOUNT FOR 160MM ROTOR DIA., MAX ROTOR DIA. = 165MM.

SRAM Corporation
Global Headquarters
1333 North Kingsbury
Chicago, IL 60622
USA 312-664-8800
REV B

GEOMETRIC DIMENSIONING AND TOLERANCING TO BE INTERPRETED PER ANSI Y14.5M 1994

* INDICATES THE DIMENSION IS CRITICAL TO THE FORM, FIT OR FUNCTION OF THE PART OR PRODUCT.

ALL DIMENSIONS ARE mm

THIRD ANGLE PROJECTION

UNTOLERANCED LENGTH DIMENSIONS (mm)

LENGTH DIMENSIONS	TOLERANCE
from 0.5 up to 6	±0.1
over 6 up to 30	±0.2
over 30 up to 120	±0.3
over 120 up to 400	±0.5
INTERCHANGE PART DIMENSION	±?

DO NOT SCALE DRAWING

DRAWN BY R. POWELL

APPROVAL C. MICKELSON

MATERIAL

CONFIDENTIAL - THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SRAM CORPORATION AND MAY NOT BE DISCLOSED WITHOUT PERMISSION.

TITLE: ROCKSHOX USER SPECIFICATION, MY07 DART

SCALE	0.3	DATE	DRAWING NUMBER	REV
FORMAT	A2	10NOV05	US-4012-293-010	H